




Wire to Wire

- * Diversified connection type for more flexible design.
- * Lock function design for more stable connection.
- * Optional flameproof plastic to meet the verification of glow wire test



Micro fit

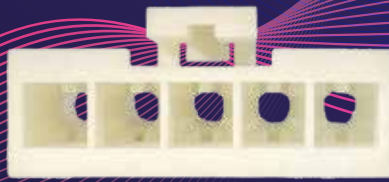

Mini fit



Mini fit



70156



MLX 42021



Micro fit

Joint Tech	C3030 Series
	Micro fit
Pitch	3.0mm
Style	Wire to Board Wire to Wire
AWG Range	20-30 AWG
Current rating	5A
Voltage rating	250V
Contact Resistance	10mΩ
Insulation Resistance	1000MΩ
Temp Range	-25°C ~ +85°C
Application	Solar Power/ robot/Automotive

Joint Tech	C4255 Series
	Mini fit
Pitch	4.25mm
Style	Wire to Board Wire to Wire
AWG Range	16-24 AWG
Current rating	9A
Voltage rating	600V
Contact Resistance	10mΩ
Insulation Resistance	1000MΩ
Temp Range	-25°C ~ +85°C
Application	Solar Power/ LED/Automotive

Joint Tech	C5080 Series
	70156
Pitch	5mm
Style	Wire to Board Wire to Wire
AWG Range	14-24 AWG
Current rating	10A
Voltage rating	250V
Contact Resistance	10mΩ
Insulation Resistance	1000MΩ
Temp Range	-25°C ~ +85°C
Application	Industry

Joint Tech	C6350 Series
	MLX 42021
Pitch	6.35mm
Style	Wire to Board Wire to Wire
AWG Range	14-20 AWG
Current rating	15A
Voltage rating	600V
Contact Resistance	3.5mΩ
Insulation Resistance	1000MΩ
Temp Range	-25°C ~ +85°C
Application	Power